

Commercial Illumination

LED Down Light Series




8" Down Light




Specifications

Item No.	B0201	B0141	B0691
Ligth Source	High Power LEDs	High Power LEDs	SMD3528 LEDs
Beam Angle	85°	85°	85°
Color Temperature	WW / NW / CW	WW / NW / CW	WW / NW / CW
Luminous Flux	900 Lm/1200 Lm	900 Lm/1200 Lm	900 Lm/1200 Lm
Input Voltage	110-120V AC 60Hz	110-120V AC 60Hz	220-240V AC 50Hz
Power Consumption	23W	23W	24W
CRI	80/75	80/75	80/75
Housing Material	Aluminium	Aluminium	Aluminium+Plastic
Aperture or Cover Materials	Painting	Painting	Painting
Install Hole	Ø210	Ø210	Ø210
Operating Temperature	-30°C - +40°C	-30°C - +40°C	-30°C - +40°C
IP Rating	IP40	IP40	IP40
Lamp Head Type	GU24	E26	/
Dimmable	0~100%	0~100%	0~100%

Dimensional Diagrams

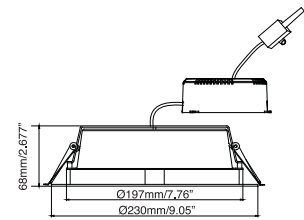
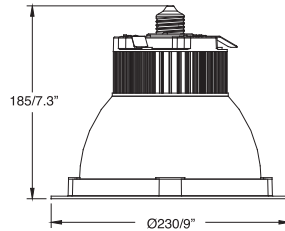
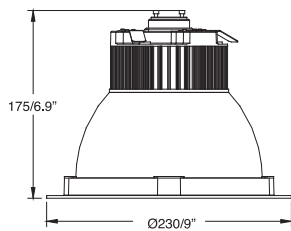


Candle Power Distribution

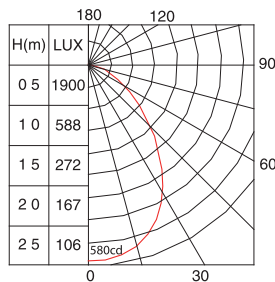



B0111-A	B0111	B0801
High Power LEDs	High Power LEDs	High Power LEDs
85°	85°	85°
WW / NW / CW	WW / NW / CW	WW / NW / CW
900 Lm/1200 Lm	900 Lm/1200 Lm	900 Lm/1200 Lm
220-240V AC 50Hz	220-240V AC 50Hz	220-240V AC 50Hz
24W	24W	21W
80/75	80/75	80/75
Aluminium+Plastic	Aluminium+Plastic	Aluminium+Plastic
Painting	Painting	Painting
Ø240	Ø240	Ø240
-30°C - +40°C	-30°C - +40°C	-30°C - +40°C
IP40	IP40	IP40
0~100%	0~100%	0~100%

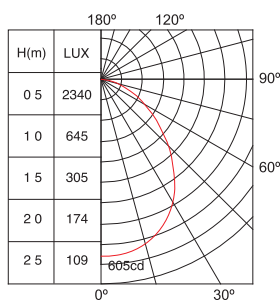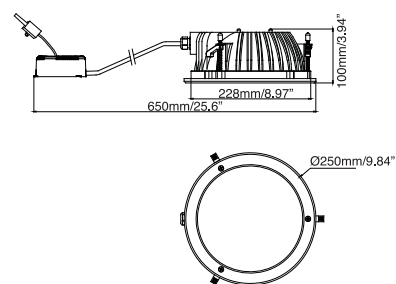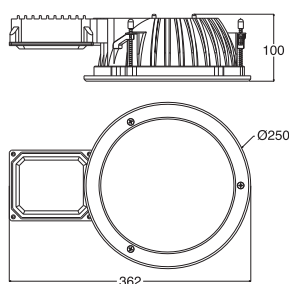

Commercial Illumination

LED Down Light Series




6" Down Light




Specifications

Item No.	B0611	B0661	B0241
Ligth Source	High Power LEDs	SMD3528 LEDs	High Power LEDs
Beam Angle	85°	85°	85°
Color Temperature	WW / NW / CW	WW / NW / CW	WW / NW / CW
Luminous Flux	575 Lm/650 Lm	575 Lm/650 Lm	575 Lm/650 Lm
Input Voltage	120V AC 60Hz	120V AC 60Hz	220-240V AC 50Hz
Power Consumption	13W	14W	13W
CRI	80/75	80/75	80/75
Housing Material	Aluminium	Aluminium+Plastic	Aluminium
Aperture or Cover Materials	Painting	Painting	Painting
Install Hole	Ø165	Ø165	Ø165
Operating Temperature	-30°C - +40°C	-30°C - +40°C	-30°C - +40°C
IP Rating	IP40	IP40	IP40
Dimmable	0~100%	0~100%	0~100%

Dimensional Diagrams


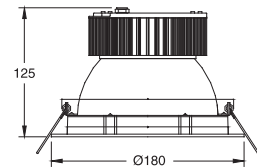
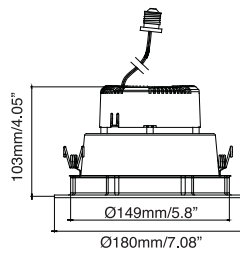
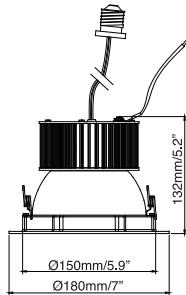


Candle Power Distribution

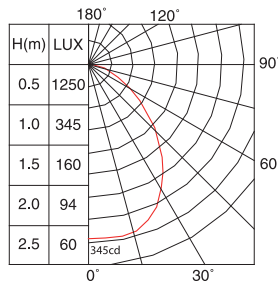



B0731	B0721	B0741
SMD3528 LEDs	SMD3528 LEDs	SMD3528 LEDs
85°	80°	85°
WW / NW / CW	WW / NW / CW	WW / NW / CW
575 Lm/650 Lm	575 Lm/650 Lm	350 Lm/450 Lm
220-240V AC 50Hz	120V AC 60Hz	220-240V AC 50Hz
14W	14W	9W
80/75	80/75	80/75
Aluminium+Plastic	Aluminium+Plastic	Aluminium+Plastic
Painting	Painting	Painting
Ø165	Ø190	Ø190
-30°C - +40°C	-30°C - +40°C	-30°C - +40°C
IP40	IP40	IP40
0~100%	0~100%	0~100%

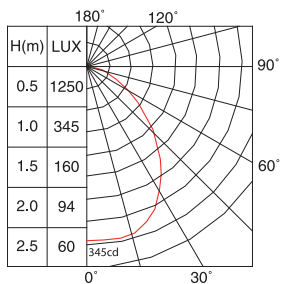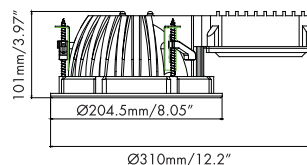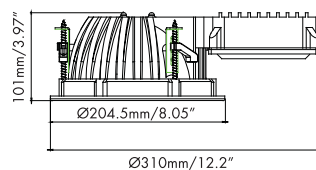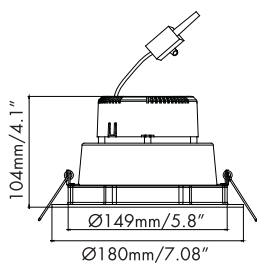

Commercial Illumination

LED Down Light Series



6" Down Light



Specifications

Item No.	B0791	B0101	B0101-B
Ligth Source	High Power LEDs	High Power LEDs	High Power LEDs
Beam Angle	85°	85°	85°
Color Temperature	WW / NW / CW	WW / NW / CW	WW / NW / CW
Luminous Flux	570 Lm/650 Lm	640 Lm	575 Lm/650 Lm
Input Voltage	220-240V AC 50Hz	220-240V AC	100-120V AC
Power Consumption	13W	13W	13W
CRI	80/75	80/75	80/75
Housing Material	Aluminium+Plastic	Aluminium+Plastic	Aluminium+Plastic
Aperture or Cover Materials	Painting	Painting	Painting
Install Hole	Ø190	Ø190	Ø190
Operating Temperature	-30°C - +40°C	-30°C - +40°C	-30°C - +40°C
IP Rating	IP40	IP40	IP40
Dimmable	0~100%	0~100%	0~100%

Dimensional Diagrams

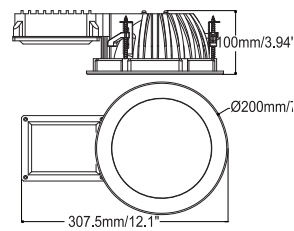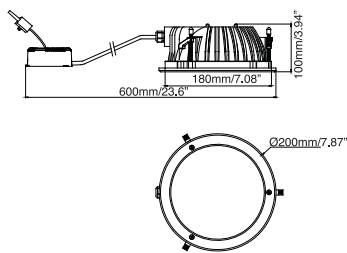

Candle Power Distribution

