

Commercial Illumination




LED I-Panel Series






Specifications

Item No.	K0073 / K0073YK	K0083 / K0083YK	K0093 / K0093YK
Ligth Source	SMD 3528 LEDs	SMD 3528 LEDs	SMD 3528 LEDs
Input Voltage	100~240V AC 50/60Hz	100~240V AC 50/60Hz	100~240V AC 50/60Hz
Power Consumption	100W	105W	31W
Color Temperature	WW / NW / CW	WW / NW / CW	WW / NW / CW
Luminous Flux	2000 Lm	2104 Lm	640 Lm
Operating Temperature	-30°C~+40°C	-30°C~+40°C	-30°C~+40°C

Dimensional Diagrams



Candle Power Distribution





K0013 / K0013YK	K0023 / K0023YK	K0033																																				
High Power LEDs	High Power LEDs	High Power LEDs																																				
100~240V AC 50/60Hz	100~240V AC 50/60Hz	100~240V AC 50/60Hz																																				
67W / 62W	67W / 62W	29W																																				
WW / NW / CW	WW / NW / CW	WW / NW / CW																																				
2240 Lm	2240 Lm / 2320 Lm	960 Lm																																				
-30°C~+40°C	-30°C~+40°C	-30°C~+40°C																																				
<table border="1"> <tr><th>H(m)</th><th>LUX</th></tr> <tr><td>0.5</td><td>3470</td></tr> <tr><td>1.0</td><td>1150</td></tr> <tr><td>1.5</td><td>460</td></tr> <tr><td>2.0</td><td>295</td></tr> <tr><td>2.5</td><td>196</td></tr> </table>	H(m)	LUX	0.5	3470	1.0	1150	1.5	460	2.0	295	2.5	196	<table border="1"> <tr><th>H(m)</th><th>LUX</th></tr> <tr><td>0.5</td><td>3600</td></tr> <tr><td>1.0</td><td>1190</td></tr> <tr><td>1.5</td><td>480</td></tr> <tr><td>2.0</td><td>305</td></tr> <tr><td>2.5</td><td>200</td></tr> </table>	H(m)	LUX	0.5	3600	1.0	1190	1.5	480	2.0	305	2.5	200	<table border="1"> <tr><th>H(m)</th><th>LUX</th></tr> <tr><td>0.5</td><td>1550</td></tr> <tr><td>1.0</td><td>390</td></tr> <tr><td>1.5</td><td>200</td></tr> <tr><td>2.0</td><td>110</td></tr> <tr><td>2.5</td><td>70</td></tr> </table>	H(m)	LUX	0.5	1550	1.0	390	1.5	200	2.0	110	2.5	70
H(m)	LUX																																					
0.5	3470																																					
1.0	1150																																					
1.5	460																																					
2.0	295																																					
2.5	196																																					
H(m)	LUX																																					
0.5	3600																																					
1.0	1190																																					
1.5	480																																					
2.0	305																																					
2.5	200																																					
H(m)	LUX																																					
0.5	1550																																					
1.0	390																																					
1.5	200																																					
2.0	110																																					
2.5	70																																					

Commercial Illumination




LED I-Panel Series






Specifications

Item No.	K1023	K1023-1	K1023-2
Ligth Source	SMD 3528 LEDs	Lamp Tpye LEDs	Lamp Type LEDs
Input Voltage	100~240V AC 50/60Hz	100~240V AC 50/60Hz	100~240V AC 50/60Hz
Power Consumption	51W	45W	50W
Color Temperature	WW / NW / CW	WW / NW / CW	WW / NW / CW
Luminous Flux	2810 Lm	2480 Lm	2242 Lm
Operating Temperature	-30°C~+40°C	-30°C~+40°C	-30°C~+40°C

Dimensional Diagrams

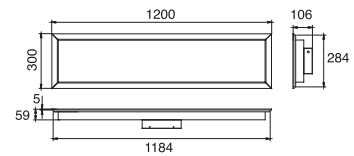

Candle Power Distribution





K1093	K1083	K1073																																										
Lamp Type LEDs	Lamp Type LEDs	Lamp Type LEDs																																										
100~240V AC 50/60Hz	100~240V AC 50/60Hz	100~240V AC 50/60Hz																																										
27.4W	24W	19.3W																																										
WW / NW / CW	WW / NW / CW	WW / NW / CW																																										
1600 Lm	1318 Lm	969 Lm																																										
-30°C~+40°C	-30°C~+40°C	-30°C~+40°C																																										
Material: Iron+PMMA	Material: Iron+PMMA	Material: Iron+PMMA																																										
<table border="1"> <thead> <tr> <th>H(m)</th> <th>LUX</th> </tr> </thead> <tbody> <tr><td>0.5</td><td>1950</td></tr> <tr><td>1.0</td><td>543</td></tr> <tr><td>1.5</td><td>264</td></tr> <tr><td>2.0</td><td>150</td></tr> <tr><td>2.5</td><td>95</td></tr> <tr><td>3.0</td><td>75</td></tr> </tbody> </table>	H(m)	LUX	0.5	1950	1.0	543	1.5	264	2.0	150	2.5	95	3.0	75	<table border="1"> <thead> <tr> <th>H(m)</th> <th>LUX</th> </tr> </thead> <tbody> <tr><td>0.5</td><td>1680</td></tr> <tr><td>1.0</td><td>460</td></tr> <tr><td>1.5</td><td>216</td></tr> <tr><td>2.0</td><td>132</td></tr> <tr><td>2.5</td><td>80</td></tr> <tr><td>3.0</td><td>61</td></tr> </tbody> </table>	H(m)	LUX	0.5	1680	1.0	460	1.5	216	2.0	132	2.5	80	3.0	61	<table border="1"> <thead> <tr> <th>H(m)</th> <th>LUX</th> </tr> </thead> <tbody> <tr><td>0.5</td><td>1680</td></tr> <tr><td>1.0</td><td>460</td></tr> <tr><td>1.5</td><td>216</td></tr> <tr><td>2.0</td><td>132</td></tr> <tr><td>2.5</td><td>80</td></tr> <tr><td>3.0</td><td>61</td></tr> </tbody> </table>	H(m)	LUX	0.5	1680	1.0	460	1.5	216	2.0	132	2.5	80	3.0	61
H(m)	LUX																																											
0.5	1950																																											
1.0	543																																											
1.5	264																																											
2.0	150																																											
2.5	95																																											
3.0	75																																											
H(m)	LUX																																											
0.5	1680																																											
1.0	460																																											
1.5	216																																											
2.0	132																																											
2.5	80																																											
3.0	61																																											
H(m)	LUX																																											
0.5	1680																																											
1.0	460																																											
1.5	216																																											
2.0	132																																											
2.5	80																																											
3.0	61																																											



Commercial Illumination


LED I-Panel Series




Specifications

Item No.	K1103
Ligth Source	Lamp Type LEDs
Input Voltage	100~240V AC 50/60Hz
Power Consumption	13.6W
Color Temperature	WW / NW / CW
Luminous Flux	634 Lm
Operating Temperature	-30°C~+40°C
Material	Aluminium+PMMA

Dimensional Diagrams



Candle Power Distribution



shop



restaurant