

Commercial Illumination




LED Landscape Path Light Series






Specifications

Item No.	80104	80134	80144
Light Source	LED	LED	LED
Beam Angle	68°	46°	14°
Input Voltage	100-240V AC 50/60Hz	100-240V AC 50/60Hz	100-240V AC 50/60Hz
Operating Current	350mA	350mA	350mA
Material	Aluminum	Aluminum	Aluminum
Operating Temperature	-30°C ~ +50°C	-30°C ~ +50°C	-30°C ~ +50°C
Angle Adjustable	180°	180°	180°

Dimensional Diagrams






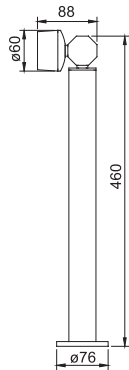


Candle Power Distribution





80974	80854	80864
LED	LED	LED
31.5°	37°	14.5°
100-240V AC 50/60Hz	100-240V AC 50/60Hz	100-240V AC 50/60Hz
350mA	350mA	350mA
Aluminm	Aluminm	Aluminm
-30°C - +50°C	-30°C - +50°C	-30°C - +50°C
NA	NA	NA



Commercial Illumination




LED Landscape Path Light Series






Specifications

Item No.	80884	80904	80764
Light Source	LED	LED	LED
Beam Angle	14.5°	14.5°	15°
Input Voltage	100-240V AC 50/60Hz	100-240V AC 50/60Hz	100-240V AC
Operating Current	350mA	350mA	700mA
Material	Aluminum	Aluminum	Aluminum
Operating Temperature	-30°C ~ +50°C	-30°C ~ +50°C	-30°C ~ +50°C
Angle Adjustable	NA	NA	NA

Dimensional Diagrams



Candle Power Distribution



CE IP65



81184	81194
LED	LED
37°	14.5°
100-240V AC 50/60Hz	100-240V AC 50/60Hz
350mA	350mA
Aluminum	Aluminum
-30°C ~ +50°C	-30°C ~ +50°C
±15°	±15°

